
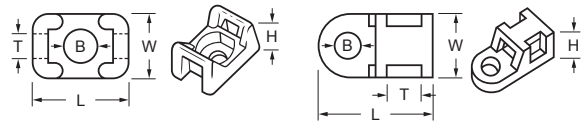


130-1010 Tie Mounts

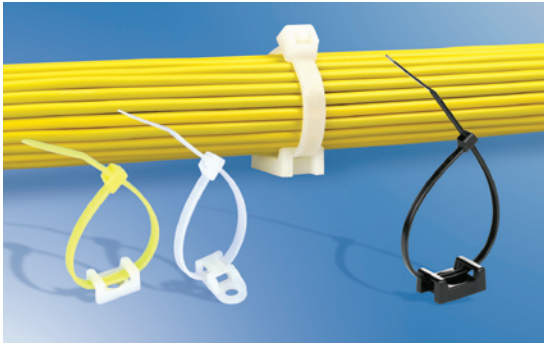



ATM - 1, 2

ATM - 1S

- Material : Nylon PA 66 (UL 94V-2).
- Colors : Natural & Black.
- Screw applies.
- Unique cradle design provides maximum stability and rigidity to the wire bundle.

Cat. No.		W	L	H	T	B	Std. Pkg.
Natural	Black	mm	mm	mm	mm	mm	pcs
ATM - 1	ATM - 1 - B	9.7	15.2	6.6	5.2	4.1	100
ATM - 2	ATM - 2 - B	16	22.5	9.6	8.6	5	
ATM - 1S	ATM - 1S - B	9.6	19.5	5	5.1	4.4	

130-2010 Adhesive Backed Mounts

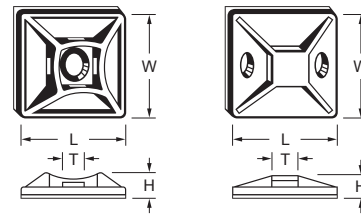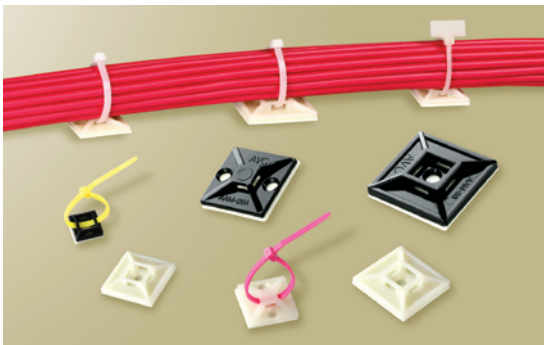



AAM

AAM-A

- Material : Nylon PA 66 (UL 94V-2) with both sides self-adhesive tapes attached.
- Colors : Natural & Black.
- Fast and easy to use. Just peel backing paper off and apply to any clean, dry, smooth, grease free surface.
- This mount is designed to secure small diameter wire bundles in locations with limited space.
- Available in 4-way insertion feature.
- The screw holes provide for where additional support is required.

Cat. No.		L X W	H	T	Screw Hole	Std. Pkg.
Natural	Black	mm	mm	mm	mm	pcs
AAM - 13	AAM - 13 - B	13 X 13	6.7	3.8	4.3	100
AAM - 20	AAM - 20 - B	20 X 20	7.2	3.8	4.4	100
AAM - 28	AAM - 28 - B	28 X 28	7.3	5.4	5.8	100
AAM - 38	AAM - 38 - B	38 X 38	8.3	8.5	5.3	50
AAM - 20A	AAM - 20A - B	20 X 20	5.4	4.5	3.3	100
AAM - 28A	AAM - 28A - B	28 X 28	6.3	6	4.7	100

130-3010 Push Mount

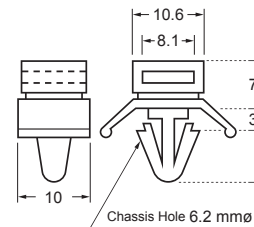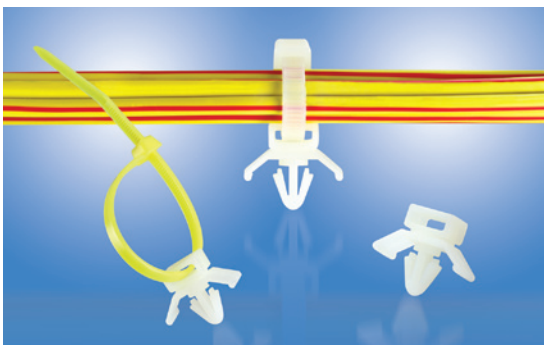

- Material : Nylon PA 66 (UL 94V-2). • Color : Natural.
- This device is a fast, economical device of mounting a harness to a maximum 3.2 mm thick panel.
- The mount is simply pushed into a nominal 6.2 mm diameter hole.
- For use of cable ties under 8 mm width, to fix tie mount on pre-drilled 6.2 mm hole and then insert cable tie through mounting to bundle wires.

Cat. No.	Std. Pkg.
	pcs
APM - 6	100