Insoulstor type:Opem frame

Contact	Dim A	Dim B	Dim C	Dim D
6	7.62	5.08	7.62	10.16
8	10.16	7.62	7.62	10.16
10	12.70	10.16	7.62	10.16
14	17.78	15.24	7.62	10.16
16	20.32	17.78	7.62	10.16
18	22.86	20.32	7.62	10.16
20	25.40	22.86	7.62	10.16
24	30.48	27.94	7.62	10.16
28	35.56	33.02	7.62	10.16
20	25.40	22.86	10.16	12.70
22	27.94	25.40	10.16	12.70
24	30.48	27.94	10.16	12.70
28	35.56	33.02	10.16	12.70
24	30.48	27.94	15.24	17.78
28	35.56	33.02	15.24	17.78
32	40.64	38.10	10.16	12.70
32	40.64	38.10	15.24	17.78
36	45.72	43.18	15.24	17.78
40	50.80	48.26	15.24	17.78
42	53.34	50.80	15.24	17.78
44	55.88	53.34	15.24	17.78
48	60.96	58.42	15.24	17.78
50	63.50	60.96	15.24	17.78
52	66.04	63.50	15.24	17.78
50	63.50	60.96	22.86	25.40
52	66.04	63.50	22.86	25.40
64	81.28	78.74	22.86	25.40

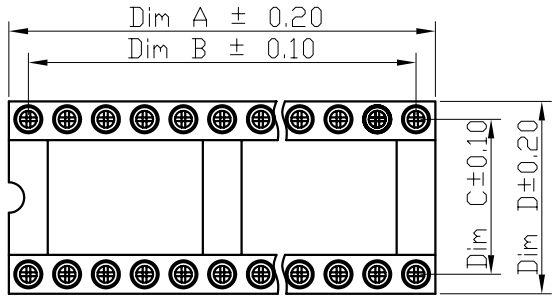

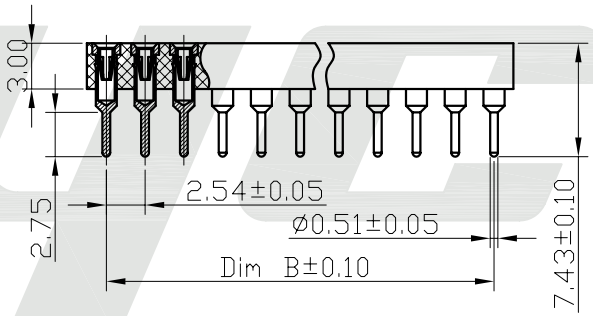

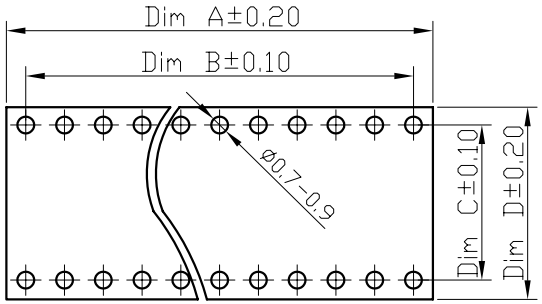

P.C.B LAYOUT

Technical Specs:

Insulator:	Black glass filled polyester PBT-GF30-FR
Flammability:	UL 94V-O
Sleeve:	Brass (H59-3)
Contact clip(4 finger):	Beryllium copper(C17300)
Accepted pin:	Ø0.40 to 0.56mm
Forces:	(polished steel gauge Ø0.43mm)
--Insertion	2 N typ
--Withdrawal	1 N typ
Mechanical life:	min100 cycles
Rated current:	1A
Contact resistance:	max 10mΩ
Dielectric resistance:	Min 1000V RMS

REV	ZONE	LTR	DESCRIPTION.	ECN.NO.	Date
E					
D					
C					
B					
A			RELEASED		12/15-06

Units: mm | Scale: 2:1

Tolerance Unless Otherwise Specified
.X ~ ±0.30
.XX ~ ±0.25
.XXX ~ ±0.20
Angle ~ ± 3°

Drawing By Date
Check By Date
Approval By Date

深圳市联益电子有限公司
HTTP：//WWW.LYCONN.COM

Date: 2006/12/15
Sheet: 1 of 1
Title: 2.54x3.0圆孔IC座/L=7.43
Thirt Angle Projection
Drawing No.: IC2540-005-A2
REV: A
File Path: M/F/MA/GCTZ/YKZ